

Ref.: VP 4449GZ-02.pas

Rev. : Initial

Date : 19/11/2013

Page : 1/1

GAZ WAFER BUTTERFLY VALVE VP 4449GZ-02NI



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

General use : gas.

GENERAL CHARACTERISTICS

From DN 40 to DN 100.
Long neck for isolation
ISO 5211 mounting pad.
Wafer type.
Full crossing stem.
Removable seat
Stainless steel disc.
9 positions lever with locking device

CONSTRUCTION

5	1	Handle	Aluminium
4	1	Stem	Stainless steel 420
3	1	Sleeve	Nitril gas
2	1	Disc	Stainless steel ASTM A351 CF8M
1	1	Body	Ductile iron EN GJS-500-7
Pos.	Q-ty	Description	Material

DIMENSIONS


DN		A	B	ØDe	E	ØF	ØG	ØP	ØT	Weight (kg)
mm	inch									
40	1 1/2	206	140	82	33	10.5	110	88	18	2.44
50	2"	228	156	102	43	10.5	125	88	18	3.52
65	2 1/2	243	162	119	46	14.5	145	88	18	4.11
80	3"	266	170	135	46	16.5	160	88	18	4.72
100	4"	294	185	155	52	16.5	180	88	18	5.9

WORKING CONDITIONS

Maximum working temperature : -20°C / 60°C
Maximum working pressure: 5 bar

STANDARDS

Fabrication according to ISO 9001:2008
face to face according to ISO 5752 short serie 20,
EN 558 serie 20 (NF 29305),BS 5155 Wafer
short/medium, DIN 3202 part 3, serie K1.
Tests according to ISO 5208.
Connection between flanges ISO PN10/PN16
according to EN 1092-1 and ISO PN20/ANSI150.

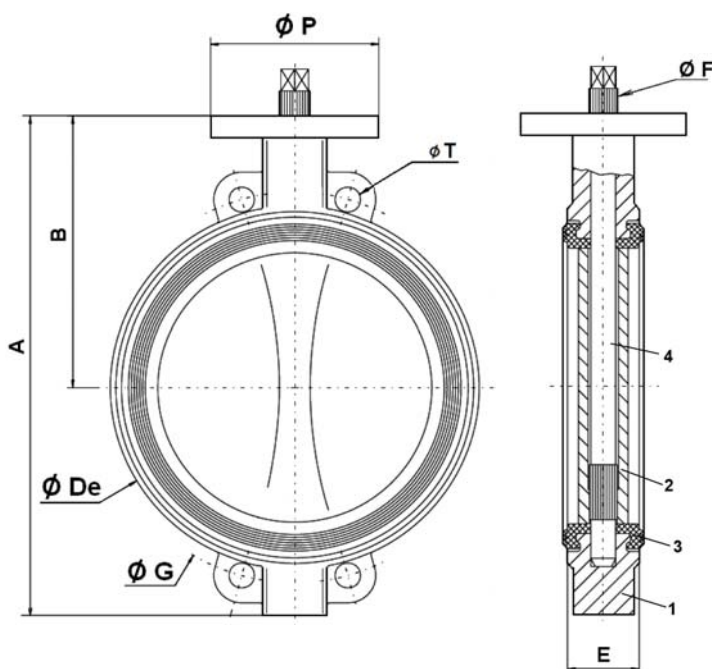

Handle vue

